

LED Work Light

CLN-A

LED
Indoor Use
Mounting in All Directions
Ambient Temperature -40°C~+60°C
Daylight

CE
RoHS 10
UL
IP66G
IP67G
IP69K

Tilt Type

Pan/Tilt Type



Model Number Configuration


CLN-24A-CD-T

①

① Mounting
T = Tilt Type
PT = Pan/Tilt Type

Dimensions (mm)

■ Tilt only (T type)

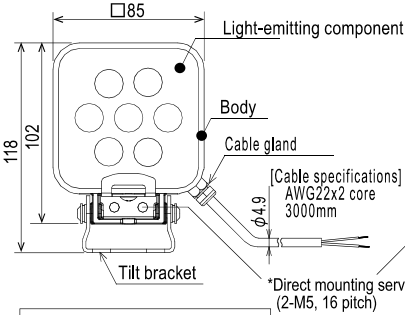


■ Tilt only (T type)



Can tilt 180° and can be folded to 33mm for easier installation.

■ Pan/Tilt (PT type)

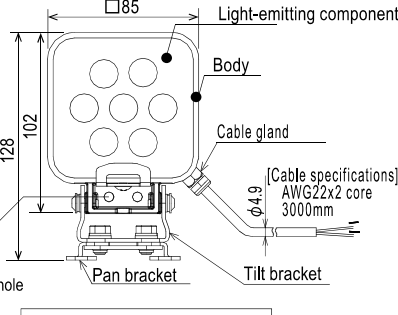


■ Pan & Tilt (PT type)




Can tilt 180° or rotated 120° to fit any application. Can be folded to 43mm for easier installation.

Mounting dimensions (T type)

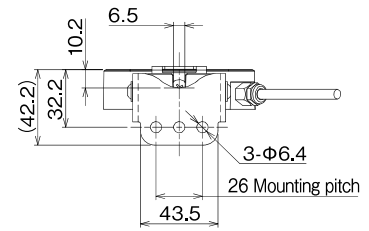

Mounting dimensions (PT type)

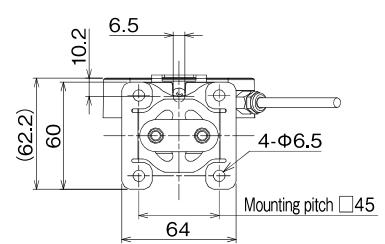

Product List

Model Number	Rated Voltage	Luminous Color	Power Consumption	Mass
CLN-24A-CD-T	24V DC	Daylight	4.2W	0.39kg
CLN-24A-CD-PT	24V DC	Daylight	4.2W	0.46kg

Specification

Description	Distance	
	Illuminance (Center, typical)	At 1.0m
At 2.0m		200lx